Data Correlation for Drag Coefficient for Sphere

Faith A. Morrison Department of Chemical Engineering Michigan Technological University, Houghton, MI 49931 10 November 2016

The correlation for drag coefficient in uniform flow around a sphere (Schlichting, 1955; Bird et. al, 2002; Denn, 1980; Geankoplis, 2003; White, 2006) is a staple of fluid flow calculations and fluid mechanics education. Engineers use the drag coefficients from this chart to calculate pressure drops and flow rates for flows around spheres, including settling and ballistics flows. A correlation is presented (Morrison, 2013) that captures drag coefficient versus Reynolds number for values of Reynolds number up to 10^6 (creeping flow, recirculating, and turbulent).

It is occasionally desirable to have a data correlation that spans the entire range of Reynolds number, from creeping flow, through flows with vorticies, and reaching the highest values of Reynolds number in turbulent flows. For this purpose, we have developed a new data correlation for uniform flow around a sphere, one that is explicit in drag coefficient and which is relatively simple in form. The equation is given below (Morrison, 2013):

Sphere drag:
$$C_{D} = \frac{24}{\text{Re}} + \frac{2.6\left(\frac{\text{Re}}{5.0}\right)}{1 + \left(\frac{\text{Re}}{5.0}\right)^{1.52}} + \frac{0.411\left(\frac{\text{Re}}{2.63 \times 10^{5}}\right)^{-7.94}}{1 + \left(\frac{\text{Re}}{2.63 \times 10^{5}}\right)^{-8.00}} + \frac{0.25\left(\frac{\text{Re}}{10^{6}}\right)}{1 + \left(\frac{\text{Re}}{10^{6}}\right)}$$
(1)

where C_D is the drag coefficient, and Re is the Reynolds number.

A plot of equation 1 is shown in Figure 1 along with data for spheres from Schlichting (1955). At low Reynolds number, equation 1 becomes the creeping flow result, $C_D=24/\text{Re}$. At the highest Reynolds numbers, equation 1 plateaus at $C_D \approx 0.14$. We do not recommend using equation 1 for Reynolds numbers larger than 10^6 . Equation 1 captures the shape of the data for uniform flow around a sphere through the highly variable transition region near $\text{Re} = 2 \times 10^5$ (Figure 1).

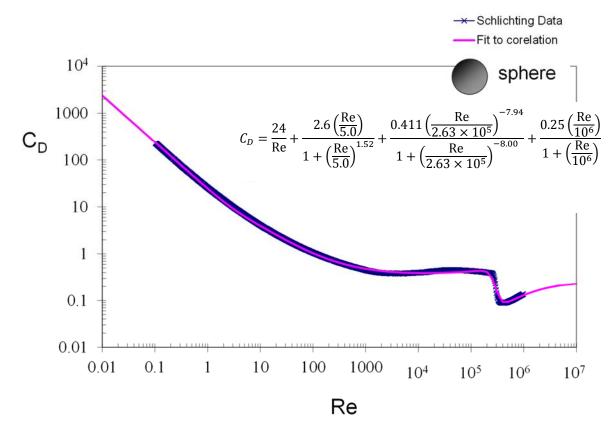


Figure 1: Equation 1 (Morrison, 2013) captures drag coefficient as a function of Reynolds number over the entire Reynolds-number range of the available experimental data. Also shown are data for uniform flow around a sphere (Schlichting, 1955). Use beyond $Re=10^6$ is not recommended; for Re<2 equation 1 follows the creeping-flow result ($C_D=24/Re$).

References:

- R. B. Bird, W. Stewart, and E. Lightfoot, *Transport Phenomena*, 2nd edition (John Wiley & Sons: New York, 2002).
- M. M. Denn, Process Fluid Mechanics (Prentice-Hall: Englewood Cliffs, NJ, 1980).
- C. J. Geankoplis, Transport Processes and Unit Operations, 4th edition, (Prentice Hall: Englewood Clifs, NY, 2003).
- F. A. Morrison, An Introduction to Fluid Mechanics, (Cambridge University Press, New York, 2013). This correlation appears in Figure 8.13 on page 625.
- H. Schlichting, Boundary Layer Theory, (McGraw-Hill, New York, 1955).
- F. M. White, *Fluid Mechanics*, 6th edition (McGraw-Hill, Inc.: New York, 2006).

Available as: Faith A. Morrison, "Data Correlation for Drag Coefficient for Sphere," Department of Chemical Engineering, Michigan Technological University, Houghton, MI, www.chem.mtu.edu/~fmorriso/DataCorrelationForSphereDrag2016.pdf.